

Surname						Other Names					
Centre Number						Candidate Number					
Candidate Signature											

Leave blank
-------------

General Certificate of Education  
 January 2004  
 Advanced Level Examination



PHAP

**PHYSICS (SPECIFICATION A)**  
**Units 5-9 Practical**

Monday 2 February 2004                      Morning Session

<p><b>In addition to this paper you will require:</b></p> <ul style="list-style-type: none"> <li>• a calculator;</li> <li>• a pencil and a ruler.</li> </ul>
--

For Examiner's Use			
Number	Mark	Number	Mark
1			
2			
Total (Column 1)	→		
Total (Column 2)	→		
TOTAL			
Examiner's Initials			

Time allowed: 1 hour 45 minutes

**Instructions**

- Use blue or black ink or ball-point pen.
- Fill in the boxes at the top of this page.
- Answer **both** questions in the spaces provided. All working must be shown.
- Do all rough work in this book. Cross through any work you do not want marked.

**Information**

- The maximum mark for this paper is 30.
- Mark allocations are shown in brackets.
- The paper carries 15% of the total marks for Physics Advanced.
- A **Data Sheet** is provided on pages 3 and 4. You may wish to detach this perforated sheet at the start of the examination.
- You are expected to use a calculator where appropriate.
- You are advised to spend no more than 30 minutes on Question 1.

**Data Sheet**

- A perforated *Data Sheet* is provided as pages 3 and 4 of this question paper.
- This sheet may be useful for answering some of the questions in the examination.
- You may wish to detach this sheet before you begin work.

Fundamental constants and values				Mechanics and Applied Physics		Fields, Waves, Quantum Phenomena	
Quantity	Symbol	Value	Units				
speed of light in vacuo	$c$	$3.00 \times 10^8$	$\text{m s}^{-1}$	$v = u + at$		$g = \frac{F}{m}$	
permeability of free space	$\mu_0$	$4\pi \times 10^{-7}$	$\text{H m}^{-1}$	$s = \left(\frac{u+v}{2}\right)t$		$g = -\frac{GM}{r^2}$	
permittivity of free space	$\epsilon_0$	$8.85 \times 10^{-12}$	$\text{F m}^{-1}$	$s = ut + \frac{at^2}{2}$		$g = -\frac{\Delta V}{\Delta x}$	
charge of electron	$e$	$1.60 \times 10^{-19}$	C	$v^2 = u^2 + 2as$		$V = -\frac{GM}{r}$	
the Planck constant	$h$	$6.63 \times 10^{-34}$	J s	$F = \frac{\Delta(mv)}{\Delta t}$		$a = -(2\pi f)^2 x$	
gravitational constant	$G$	$6.67 \times 10^{-11}$	$\text{N m}^2 \text{kg}^{-2}$	$P = Fv$		$v = \pm 2\pi f \sqrt{A^2 - x^2}$	
the Avogadro constant	$N_A$	$6.02 \times 10^{23}$	$\text{mol}^{-1}$	$\text{efficiency} = \frac{\text{power output}}{\text{power input}}$		$x = A \cos 2\pi ft$	
molar gas constant	$R$	8.31	$\text{J K}^{-1} \text{mol}^{-1}$	$\omega = \frac{v}{r} = 2\pi f$		$T = 2\pi \sqrt{\frac{m}{k}}$	
the Boltzmann constant	$k$	$1.38 \times 10^{-23}$	$\text{J K}^{-1}$	$a = \frac{v^2}{r} = r\omega^2$		$T = 2\pi \sqrt{\frac{l}{g}}$	
the Stefan constant	$\sigma$	$5.67 \times 10^{-8}$	$\text{W m}^{-2} \text{K}^{-4}$	$I = \sum mr^2$		$\lambda = \frac{\omega s}{D}$	
the Wien constant	$\alpha$	$2.90 \times 10^{-3}$	m K	$E_k = \frac{1}{2} I\omega^2$		$d \sin \theta = n\lambda$	
electron rest mass	$m_e$	$9.11 \times 10^{-31}$	kg	$\omega_2 = \omega_1 + at$		$\theta \approx \frac{\lambda}{D}$	
(equivalent to $5.5 \times 10^{-4}u$ )				$\theta = \omega_1 t + \frac{1}{2} at^2$		$1/n_2 = \frac{\sin \theta_1}{\sin \theta_2} = \frac{c_1}{c_2}$	
electron charge/mass ratio	$e/m_e$	$1.76 \times 10^{11}$	$\text{C kg}^{-1}$	$\omega_2^2 = \omega_1^2 + 2\alpha\theta$		$1/n_2 = \frac{n_2}{n_1}$	
proton rest mass	$m_p$	$1.67 \times 10^{-27}$	kg	$\theta = \frac{1}{2}(\omega_1 + \omega_2)t$		$\sin \theta_c = \frac{1}{n}$	
(equivalent to 1.00728u)				$T = I\alpha$		$E = hf$	
proton charge/mass ratio	$e/m_p$	$9.58 \times 10^7$	$\text{C kg}^{-1}$	$\text{angular momentum} = I\omega$		$hf = \phi + E_k$	
neutron rest mass	$m_n$	$1.67 \times 10^{-27}$	kg	$W = T\theta$		$hf = E_1 - E_2$	
(equivalent to 1.00867u)				$P = T\omega$		$\lambda = \frac{h}{p} = \frac{h}{mv}$	
gravitational field strength	$g$	9.81	$\text{N kg}^{-1}$	$\text{angular impulse} = \text{change of angular momentum} = Tt$		$c = \frac{1}{\sqrt{\mu_0 \epsilon_0}}$	
acceleration due to gravity	$g$	9.81	$\text{m s}^{-2}$	$\Delta Q = \Delta U + \Delta W$			
atomic mass unit	$u$	$1.661 \times 10^{-27}$	kg	$\Delta W = p\Delta V$			
(1u is equivalent to 931.3 MeV)				$pV^\gamma = \text{constant}$			
<b>Fundamental particles</b>				<b>Electricity</b>			
Class	Name	Symbol	Rest energy /MeV	work done per cycle = area of loop		$\epsilon = \frac{E}{Q}$	
photon	photon	$\gamma$	0	input power = calorific value $\times$ fuel flow rate		$\epsilon = I(R + r)$	
lepton	neutrino	$\nu_e$	0	indicated power as (area of p - V loop) $\times$ (no. of cycles/s) $\times$ (no. of cylinders)		$\frac{1}{R_T} = \frac{1}{R_1} + \frac{1}{R_2} + \frac{1}{R_3} + \dots$	
		$\nu_\mu$	0	friction power = indicated power - brake power		$R_T = R_1 + R_2 + R_3 + \dots$	
	electron	$e^\pm$	0.510999	efficiency = $\frac{W}{Q_{in}} = \frac{Q_{in} - Q_{out}}{Q_{in}}$		$P = I^2 R$	
	muon	$\mu^\pm$	105.659	maximum possible efficiency = $\frac{T_H - T_C}{T_H}$		$E = \frac{F}{Q} = \frac{V}{d}$	
mesons	pion	$\pi^\pm$	139.576			$E = \frac{1}{4\pi\epsilon_0} \frac{Q}{r^2}$	
		$\pi^0$	134.972			$E = \frac{1}{2} QV$	
	kaon	$K^\pm$	493.821			$F = BIl$	
		$K^0$	497.762			$F = BQv$	
baryons	proton	p	938.257			$Q = Q_0 e^{-t/RC}$	
	neutron	n	939.551			$\phi = BA$	
<b>Properties of quarks</b>							
Type	Charge	Baryon number	Strangeness				
u	$+\frac{2}{3}$	$+\frac{1}{3}$	0				
d	$-\frac{1}{3}$	$+\frac{1}{3}$	0				
s	$-\frac{1}{3}$	$+\frac{1}{3}$	-1				
<b>Geometrical equations</b>							
arc length = $r\theta$							
circumference of circle = $2\pi r$							
area of circle = $\pi r^2$							
area of cylinder = $2\pi rh$							
volume of cylinder = $\pi r^2 h$							
area of sphere = $4\pi r^2$							
volume of sphere = $\frac{4}{3}\pi r^3$							

magnitude of induced e.m.f. =  $N \frac{\Delta\Phi}{\Delta t}$

$I_{\text{rms}} = \frac{I_0}{\sqrt{2}}$

$V_{\text{rms}} = \frac{V_0}{\sqrt{2}}$

**Mechanical and Thermal Properties**

the Young modulus =  $\frac{\text{tensile stress}}{\text{tensile strain}} = \frac{F l}{A e}$

energy stored =  $\frac{1}{2} Fe$

$\Delta Q = mc \Delta\theta$

$\Delta Q = ml$

$pV = \frac{1}{3} Nmc^2$

$\frac{1}{2} mc^2 = \frac{3}{2} kT = \frac{3RT}{2N_A}$

**Nuclear Physics and Turning Points in Physics**

force =  $\frac{eV_p}{d}$

force =  $Bev$

radius of curvature =  $\frac{mv}{Be}$

$\frac{eV}{d} = mg$

work done =  $eV$

$F = 6\pi\eta rv$

$I = k \frac{I_0}{x^2}$

$\frac{\Delta N}{\Delta t} = -\lambda N$

$\lambda = \frac{h}{\sqrt{2meV}}$

$N = N_0 e^{-\lambda t}$

$T_{\frac{1}{2}} = \frac{\ln 2}{\lambda}$

$R = r_0 A^{\frac{1}{3}}$

$E = mc^2 = \frac{m_0 c^2}{\left(1 - \frac{v^2}{c^2}\right)^{\frac{1}{2}}}$

$l = l_0 \left(1 - \frac{v^2}{c^2}\right)^{\frac{1}{2}}$

$t = \frac{t_0}{\left(1 - \frac{v^2}{c^2}\right)^{\frac{1}{2}}}$

**Astrophysics and Medical Physics**

Body	Mass/kg	Mean radius/m
Sun	$2.00 \times 10^{30}$	$7.00 \times 10^8$
Earth	$6.00 \times 10^{24}$	$6.40 \times 10^6$

1 astronomical unit =  $1.50 \times 10^{11}$  m

1 parsec =  $206265 \text{ AU} = 3.08 \times 10^{16}$  m = 3.26 ly

1 light year =  $9.45 \times 10^{15}$  m

Hubble constant ( $H$ ) =  $65 \text{ km s}^{-1} \text{ Mpc}^{-1}$

$M = \frac{\text{angle subtended by image at eye}}{\text{angle subtended by object at unaided eye}}$

$M = \frac{f_o}{f_e}$

$m - M = 5 \log \frac{d}{10}$

$\lambda_{\text{max}} T = \text{constant} = 0.0029 \text{ m K}$

$v = Hd$

$P = \sigma AT^4$

$\frac{\Delta f}{f} = \frac{v}{c}$

$\frac{\Delta \lambda}{\lambda} = -\frac{v}{c}$

$R_s \approx \frac{2GM}{c^2}$

**Medical Physics**

power =  $\frac{1}{f}$

$\frac{1}{u} + \frac{1}{v} = \frac{1}{f}$  and  $m = \frac{v}{u}$

intensity level =  $10 \log \frac{I}{I_0}$

$I = I_0 e^{-\mu x}$

$\mu_m = \frac{\mu}{\rho}$

**Electronics**

Resistors

Preferred values for resistors (E24)  
 Series: 1.0 1.1 1.2 1.3 1.5 1.6 1.8 2.0 2.2 2.4 2.7 3.0 3.3 3.6 3.9 4.3 4.7 5.1 5.6 6.2 6.8 7.5 8.2 9.1 ohms  
 and multiples that are ten times greater

$Z = \frac{V_{\text{rms}}}{I_{\text{rms}}}$

$\frac{1}{C_T} = \frac{1}{C_1} + \frac{1}{C_2} + \frac{1}{C_3} + \dots$

$C_T = C_1 + C_2 + C_3 + \dots$

$X_C = \frac{1}{2\pi f C}$

**Alternating Currents**

$f = \frac{1}{T}$

**Operational amplifier**

$G = \frac{V_{\text{out}}}{V_{\text{in}}}$  voltage gain

$G = -\frac{R_f}{R_1}$  inverting

$G = 1 + \frac{R_f}{R_1}$  non-inverting

$V_{\text{out}} = -R_f \left( \frac{V_1}{R_1} + \frac{V_2}{R_2} + \frac{V_3}{R_3} \right)$  summing

Answer **both** questions.

You are advised to spend no more than 30 minutes on Question 1.

1 Students are shown a demonstration illustrating some principles of electromagnetic induction.


A coil is wrapped around the full length of a vertical perspex tube through which a soft iron rod is inserted.

An aluminium ring is placed over the upper end of the rod.

When released from rest, the ring falls freely down the gap between the rod and the perspex tube.

The time taken for the aluminium ring to fall from the top to the bottom of the perspex tube is noted.

When an alternating current is passed through the coil, the time taken for the aluminium ring to fall from the top to the bottom of the perspex tube is seen to increase slightly.

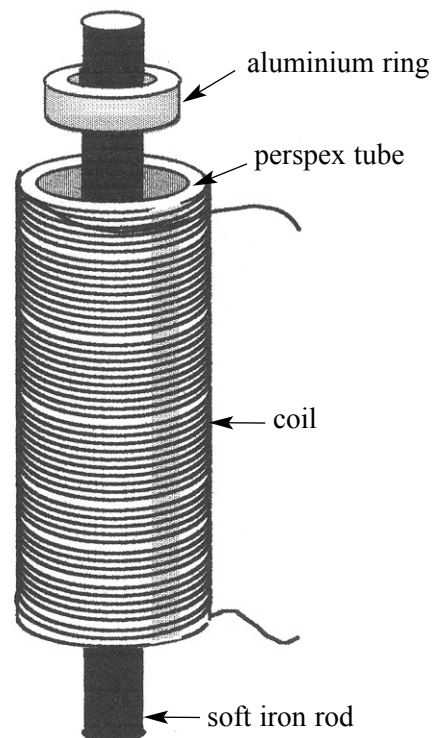

Design an experiment to investigate how some variable factor or measurable detail of the experimental arrangement affects the time for the aluminium ring to fall from the top to the bottom of the perspex tube.

You should assume that the normal laboratory apparatus used in schools and colleges is available. You may wish to draw a diagram to illustrate your answer.

You should also include the following in your answer:

- The quantities you intend to measure and how you will measure them.
- How you propose to use your measurements to obtain reliable results for the investigation.
- Any factors you will need to control and how you will do this.
- How you could overcome any difficulties in obtaining reliable results.

Write your answers to Question 1 on **pages 6 and 7** of this booklet.

(8 marks)



Handwriting practice area with 25 horizontal dotted lines.

2 You are required to measure the time period of a V-shaped pendulum.


**No description of the experiment is required.**

- (a) You are provided with a metre ruler fitted with two wire loops. Clamp each end of this ruler 0.60 m above the bench so that the ruler is horizontal with the graduated face of the ruler towards you.

A length of thread has been attached to one of the loops. Pass the free end of the thread through the hole in the mass  $M$  and then through the other wire loop.

Check that the total length of thread joining the two wire loops lies between 1.00 m and 1.20 m. Secure the free end of the thread to the wire loop to form a V-shaped pendulum, as shown in the diagram.

**Once you have constructed the pendulum, do not subsequently change the length of the thread joining the two wire loops.**

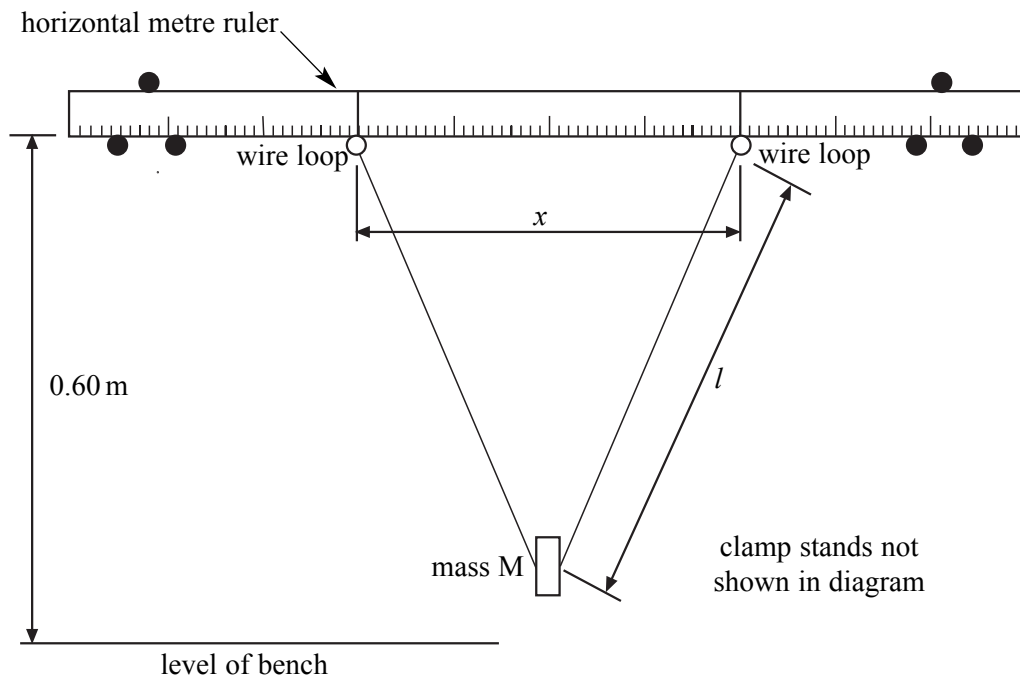

Adjust the position of the wire loops until the distance,  $x$ , marked in the diagram, is 0.40 m. Adjust the position of the mass until the length,  $l$ , of each part of the thread is the same.


Measure and record  $l$ .

$l = \dots\dots\dots$

(1 mark)





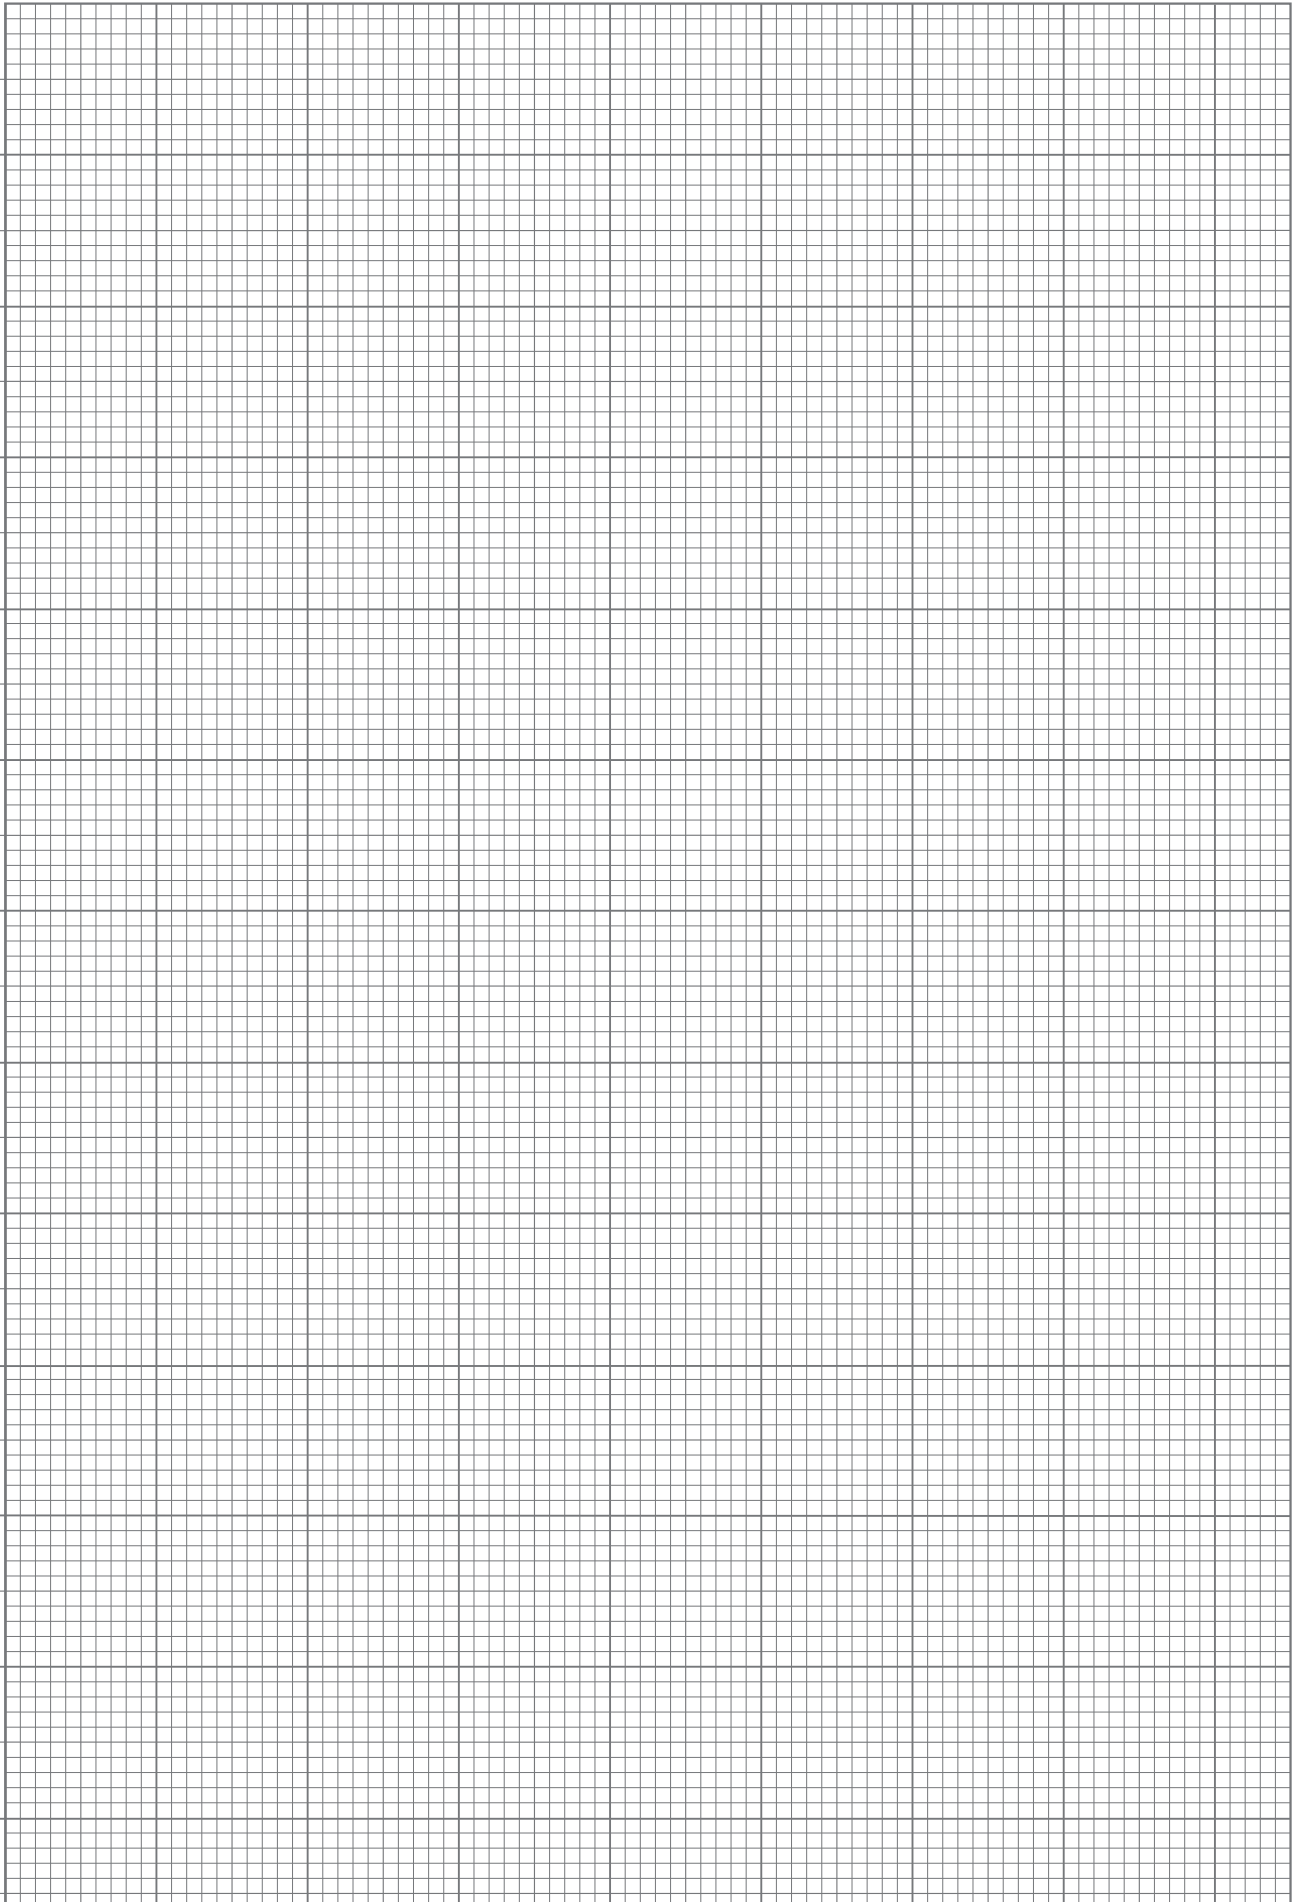

(d) Measure and record the gradient,  $G$ , of your graph.

.....  
.....

$G = \dots\dots\dots$

(3 marks)

(e) (i) Use your graph to determine  $T_s$ , the period of the pendulum when  $x = 0$ .

.....  
.....

(ii) When  $x = 0$ , you can assume the system behaves as a simple pendulum of length  $l$ . Assuming that there is no error in your measurement of  $l$ , calculate a theoretical value for  $T_s$ .

.....  
.....  
.....  
.....  
.....

(iii) Suppose any difference between the theoretical value of  $T_s$  and the value of  $T_s$  obtained from the graph is caused by similar percentage errors in the measurement of  $x$  and of  $T$ . State and explain which of these errors will make the more significant contribution to the difference in the values for  $T_s$ .

.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....  
.....

(6 marks)